


	C20	C21	C22	C23	C24	PC1
3F						
主 筋	▲28-#8	▲28-#8	▲32-#8	▲40-#8	▲40-#8	
梁柱接頭箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱圈梁區箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱中央區箍筋	#4@15	#4@15	#4@15	#4@15	#4@15	
斷面尺寸	110x110	100x100	110x110	110x110	110x110	
2F						
主 筋	○44-#10	○32-#10	○36-#10	○40-#10	○44-#10	
梁柱接頭箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱圈梁區箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱中央區箍筋	#4@15	#4@15	#4@15	#4@15	#4@15	
斷面尺寸	110x110	100x100	110x110	110x110	110x110	
1F						
主 筋	○44-#10	○36-#10	○40-#10	○44-#10	○44-#10 + ○4-#10	
梁柱接頭箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱圈梁區箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱中央區箍筋	#4@15	#4@15	#4@15	#4@15	#4@12	
斷面尺寸	110x110	100x100	110x110	110x110	110x110	
B1F						
主 筋	○44-#10	○36-#10	○40-#10			○12-#10
梁柱接頭箍筋	#4@10	#4@10	#4@10			#4@10
柱圈梁區箍筋	#4@10	#4@10	#4@10			#4@10
柱中央區箍筋	#4@15	#4@15	#4@15			#4@12
斷面尺寸	110x110	100x100	110x110			60x60
B2F						
主 筋	○44-#10	○36-#10	○40-#10			
梁柱接頭箍筋	#4@10	#4@10	#4@10			
柱圈梁區箍筋	#4@10	#4@10	#4@10			
柱中央區箍筋	#4@15	#4@15	#4@15			
斷面尺寸	110x110	100x100	110x110			
B3F						
主 筋	○44-#10	○36-#10	○40-#10			
梁柱接頭箍筋	#4@10	#4@10	#4@10			
柱圈梁區箍筋	#4@10	#4@10	#4@10			
柱中央區箍筋	#4@15	#4@15	#4@15			
斷面尺寸	110x110	100x100	110x110			

	C20	C21	C22	C23	C24	PC1
R2F						
主 筋						
梁柱接頭箍筋						
柱圈梁區箍筋						
柱中央區箍筋						
斷面尺寸						
R1F						
主 筋						
梁柱接頭箍筋						
柱圈梁區箍筋						
柱中央區箍筋						
斷面尺寸						
7F						
主 筋			▲28-#8			
梁柱接頭箍筋			#4@10			
柱圈梁區箍筋			#4@10			
柱中央區箍筋			#4@15			
斷面尺寸			110x110			
6F						
主 筋	▲28-#8	▲24-#8	▲28-#8			
梁柱接頭箍筋	#4@10	#4@10	#4@10			
柱圈梁區箍筋	#4@10	#4@10	#4@10			
柱中央區箍筋	#4@15	#4@12	#4@15			
斷面尺寸	110x110	100x100	110x110			
5F						
主 筋	▲32-#8	▲24-#8	▲28-#8			
梁柱接頭箍筋	#4@10	#4@10	#4@10			
柱圈梁區箍筋	#4@10	#4@10	#4@10			
柱中央區箍筋	#4@15	#4@15	#4@15			
斷面尺寸	110x110	100x100	110x110			
4F						
主 筋	▲36-#8	▲24-#8	▲28-#8	▲36-#8	▲40-#8	
梁柱接頭箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱圈梁區箍筋	#4@10	#4@10	#4@10	#4@10	#4@10	
柱中央區箍筋	#4@15	#4@15	#4@15	#4@15	#4@12	
斷面尺寸	110x110	100x100	110x110	110x110	110x110	

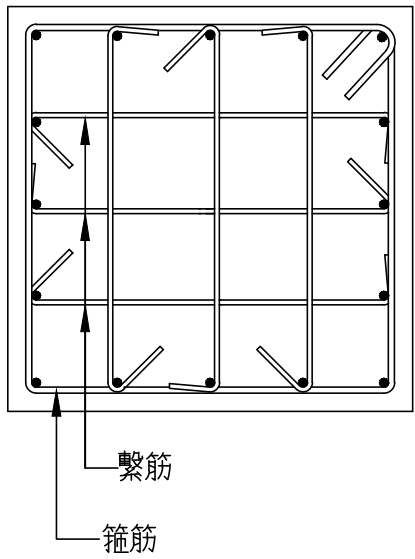

- 說明:
- 1.箍筋須做135° 標準彎鉤加6db(≥7.5cm)之延伸，上下相鄰箍筋彎鉤位置要交互錯開。
 - 2.繫筋一端做135° 標準彎鉤加6db(≥7.5cm)之延伸，另一端則做90° 標準彎鉤加6db之延伸，不同之則做90標準彎鉤方式在上下及左右但均須和箍筋緊密相接。
 - 3.任一向之繫筋若置於箍筋之上，則另一向應置於箍筋之下，相鄰箍筋之間須交互錯開排放。
 - 4.柱主筋若有束筋時，於四個角隅部份朝45° 斜向排列，其它部份則與箍筋成90° 之垂直方向排列。
 - 5.此箍筋圖適用於耐震韌性設計之柱子。